

Fingerprint Reader and Keypad

SK-2611-SFSQ

1,000 Users, 12VDC

Features:

- Up to 500 fingerprint users (1~500)
- Up to 500 user codes (501~1000)
- Output: Form C relay, 2A@12VDC max.
- Output can be programmed to activate for up to 99 seconds or toggle
- Tamper alarm output: Transistor ground, 2.5A@12VDC max.
- Fingerprint reader window illuminates when finger is present
- Tri-color LED provides status information
- EEPROM Memory protects programmed information in case of power loss
- All features programmed directly from the fingerprint reader/keypad: No need for an external programmer
- Egress input lets users exit the premises without presenting a fingerprint or keying in a code
- 500DPI Optical fingerprint reader
- Fingerprint identification time – <1 second
- Fingerprint false acceptance rate – <0.0001%
- Fingerprint false rejection rate – <0.01%
- For indoor use



500
DPI

Form C
Relay


1,000
Users

Egress
Input

Specifications:

Operating voltage		12VDC
Current draw	Standby	40mA
	Active	100mA
Outputs	Form C	2A@12VDC
	Tamper alarm	2.5A@12VDC
Egress input		N.O. Ground
Enclosure material		Zinc alloy
Operating temperature		-4°~122° F (-20°~50° C)
Operating humidity		20~90%
Dimensions		2 ⁵ / ₈ "x5 ⁷ / ₈ "x1 ⁵ / ₁₆ " (66x150x24 mm)
Weight		14.8-oz (420g)

Dimensions:

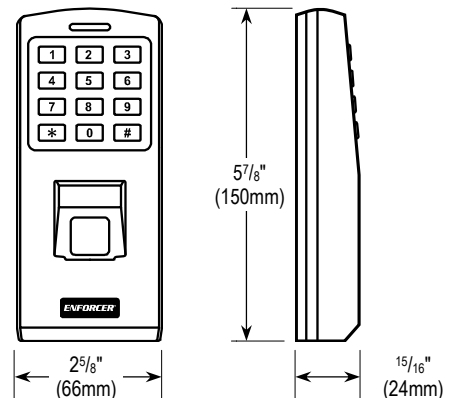

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2017 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PI_SK-2611-SFSQ_170425.docx