
WireCrafters

RapidGuard II - 1-1/4" x 1-1/4" - 10 GA Welded Wire Mesh

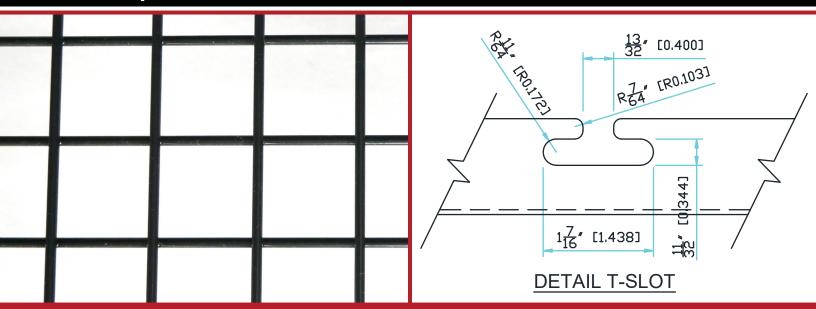

Mesh Specifications

Mesh

Thickness: 10 GA

Design: 1-5/16" x 1-5/16" (center to center) square welded wire (1-1/4" actual opening)

Open Air Percentage: 81.46%

Panels

Frame: 1-1/4" x 1-1/4" x 13 GA Roll Formed Angle

Fabrication: Mesh is securely welded to the frame with a flat steel stiffener welded to the frame behind the

mesh for panels with a height equal to or greater than 6' - 1-1/2"

Stock Panel Dimensions: 1' - 5' Wide in 1' increments at Heights of 2' - 10-1/8", 6' - 1-1/2", and 8'. (Actual panel widths are 11 - 15/16"w to 4' - 11-15/16"w in 1' increments due to threaded inserts in post)

5'-0"w x 10'-0"h maximum size (custom)

Doors

Frame: 1-1/4" x 1-1/4" x 13 GA Roll Formed Angle

Fabrication: Mesh is securely welded to the frame with flat steel stiffeners welded to the frame for extra

strength where needed.

Post

Material: 2" x 2" x 14 GA Square Tubing

Fabrication: 1/4" x 6" x 6" plate welded at the base of the post.

Hardware

Shall be 5/16" standard thread grade two plated for panel connections. Door hardware shall be 1/4" x 1" self-drilling screws. 3/8" floor anchors and all other hardware provided with each job.

Finish

Non-plated parts are powder coated; panels are powder coated black (including doors) and posts are powder coated yellow. Other colors are available for an up charge. The product is finished for interior applications. Materials are shipped and subject to nicks and scrapes while in transit.